



The manufacturer
may use the mark:



Revision 2.0 December 20, 2024
Surveillance Audit Due
Dec 1, 2027



Certificate / Certificat Zertifikat / 合格証

PFE 2005050 C001

exida hereby confirms that the:

PF2200-DB Burner Control System

**Profire Energy, Inc.
Acheson, AB - Canada**

Has been assessed per the relevant requirements of:

IEC 61508 : 2010 Parts 1-3

and meets requirements providing a level of integrity to:

Systematic Capability: SC 2 (SIL 2 Capable)

Random Capability: Type B Element

SIL 2 @ HFT = 0; Route 1_H

**PFH/PFD_{avg} and Architecture Constraints
must be verified for each application**


Safety Function:


The PF2200-DB monitors and controls two independent burners using pre-defined operating sequences. The PF2200-DB also monitors interlock signals, and transitions to Safety Shutdown (Lockout) if conditions are judged to be unsafe.

Application Restrictions:

The unit must be properly designed into a Safety Instrumented Function per the Safety Manual requirements.

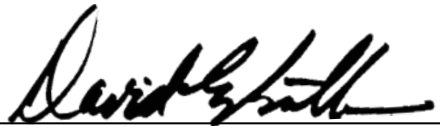


Evaluating Assessor


Certifying Assessor

PFE 2005050 C001

Systematic Capability: SC 2 (SIL 2 Capable)**Random Capability: Type B Element****SIL 2 @ HFT=0; Route 1_H****PFH/PFD_{avg} and Architecture Constraints
must be verified for each application****Systematic Capability:**

The Product has met manufacturer design process requirements of Safety Integrity Level (SIL) 2. These are intended to achieve sufficient integrity against systematic errors of design by the manufacturer.

A Safety Instrumented Function (SIF) designed with this product must not be used at a SIL level higher than stated.

Random Capability:

The SIL limit imposed by the Architectural Constraints must be met for each element. This element meets *exida* criteria for Route 1_H.

IEC 61508 Failure Rates in FIT*

Application/Device/Configuration	λ_{SD}	λ_{SU}	λ_{DD}	λ_{DU}
Common	347	57	146	51
RTD input channel	0	0	7	0.01
TC input channel	0	0	7	0.1
4-20mA/digital input channel	31	0.3	11	0.15
dry input channel	0.14	5	0	1
Ionization input channel	13.4	0.24	0	0.24
Ignition coil output channel	0	1	55	2
Powered output channel	50	0.3	16	0.16

* FIT = 1 failure / 10⁹ hours

SIL Verification:

The Safety Integrity Level (SIL) of an entire Safety Instrumented Function (SIF) must be verified via a calculation of PFH/PFD_{avg} considering redundant architectures, proof test interval, proof test effectiveness, any automatic diagnostics, average repair time and the specific failure rates of all products included in the SIF. Each element must be checked to assure compliance with minimum hardware fault tolerance (HFT) requirements.

The following documents are a mandatory part of certification:

Assessment Report: PFE 20-05-050 R002 V2R0 (or later)

Safety Manual: PF2200-DB Product Manual_Appendix A_v4.0



80 N Main St
Sellersville, PA 18960